


PRODUCT INFORMATION

GENERAL DESCRIPTION

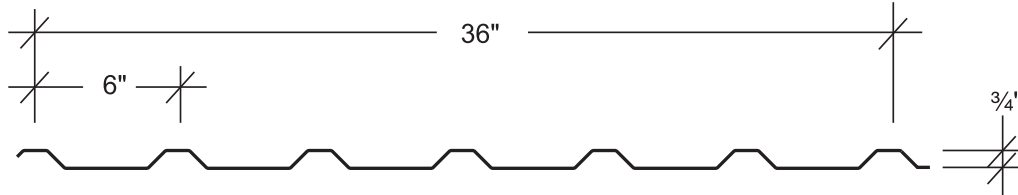

PBU PANEL

Coverage Width - 36"

Minimum Slope - 1:12

Panel Substrate - Galvalume®

Gauge - 26 standard - 29, 24 and 22 also available

Coatings- Galvalume Plus® , Signature® 200* and Signature® 300*

PRODUCT SELECTION CHART

GAUGE	GALVALUME PLUS®	SIGNATURE® 200*	SIGNATURE® 300*
22 gauge	●	■	■
24 gauge	●	■	■
26 gauge	●	●	●
29 gauge	●	●	■

● - Available in any quantity.


■ - Minimum quantity may be required.

*See Commercial/Industrial color chart for available colors.

Signature is a registered trademark of Metal Building Components, L.P. Galvalume Plus is a registered and protected trademark of BIEC International, Inc.
 ❖ The Galvalume Plus® coating is subject to variances in spangle from coil to coil which may result in noticeable shade variation in installed panels. The Galvalume Plus® coating is also subject to differential weathering after panel installation. Panels may appear to be different shades due to this weathering characteristic. If a consistent appearance is required, MBCI recommends that pre-painted panels be used in lieu of Galvalume Plus®. Shade variation in panels manufactured from Galvalume Plus® coated material do not diminish the structural integrity of the product. These shade variations should be anticipated and are not a cause for rejection.

PRODUCT INFORMATION

PBU PANEL

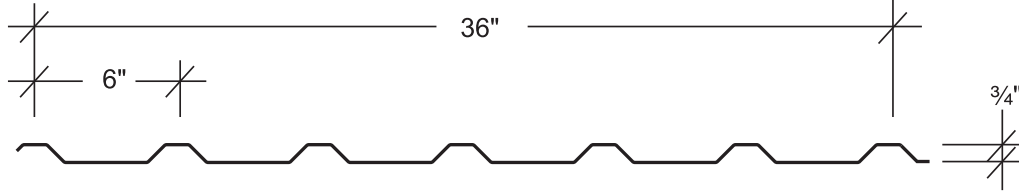

29 Gauge (0.0133"), Fy = 60 ksi, Fu = 61.5 ksi

SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	93.75	52.73	33.75	23.44	17.22	13.18	10.42
	LIVE LOAD/DEFLECTION	67.01	32.53	16.66	9.64	6.07	4.07	2.86
2-span	NEGATIVE WIND LOAD	61.91	37.19	24.61	17.42	12.96	10.00	7.94
	LIVE LOAD/DEFLECTION	70.40	45.18	30.41	21.75	16.28	12.62	9.40
3-span	NEGATIVE WIND LOAD	73.01	44.74	29.96	21.37	15.96	12.36	9.84
	LIVE LOAD/DEFLECTION	80.00	53.43	36.52	22.73	14.32	9.59	6.74
4-span	NEGATIVE WIND LOAD	69.51	42.31	28.22	20.08	14.97	11.58	9.21
	LIVE LOAD/DEFLECTION	77.00	50.82	34.56	24.74	15.58	10.44	7.33

26 Gauge (0.0181"), Fy = 60 ksi, Fu = 61.5 ksi

SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	133.48	75.08	48.05	33.37	24.52	18.77	14.83
	LIVE LOAD/DEFLECTION	119.08	52.22	26.74	15.47	9.74	6.53	4.58
2-span	NEGATIVE WIND LOAD	114.41	66.59	43.33	30.37	22.44	17.24	13.66
	LIVE LOAD/DEFLECTION	105.60	71.09	46.37	32.55	24.07	18.51	13.88
3-span	NEGATIVE WIND LOAD	138.49	81.62	53.46	37.61	27.86	21.44	17.00
	LIVE LOAD/DEFLECTION	120.00	86.91	57.11	34.86	21.95	14.71	10.33
4-span	NEGATIVE WIND LOAD	130.70	76.70	50.12	35.22	26.06	20.05	15.89
	LIVE LOAD/DEFLECTION	115.50	81.75	53.58	37.71	23.77	15.93	11.18

24 Gauge (0.0223"), Fy = 50 ksi, Fu = 60 ksi

SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	126.37	71.08	45.49	31.59	23.21	17.77	14.04
	LIVE LOAD/DEFLECTION	125.69	70.70	38.51	22.28	14.03	9.40	6.60
2-span	NEGATIVE WIND LOAD	120.59	69.04	44.56	31.09	22.91	17.57	13.90
	LIVE LOAD/DEFLECTION	117.33	69.40	44.80	31.25	23.03	17.66	13.97
3-span	NEGATIVE WIND LOAD	148.17	85.44	55.34	38.68	28.53	21.90	17.34
	LIVE LOAD/DEFLECTION	133.33	85.87	55.62	38.89	28.68	19.34	13.58
4-span	NEGATIVE WIND LOAD	139.13	80.03	51.77	36.16	26.66	20.46	16.19
	LIVE LOAD/DEFLECTION	128.33	80.43	52.04	36.35	26.81	20.57	14.45

22 Gauge (0.0286"), Fy = 50 ksi, Fu = 60 ksi

SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	163.85	92.16	58.98	40.96	30.09	23.04	18.21
	LIVE LOAD/DEFLECTION	174.46	98.14	52.70	30.50	19.21	12.87	9.04
2-span	NEGATIVE WIND LOAD	168.30	96.14	61.98	43.21	31.83	24.41	19.31
	LIVE LOAD/DEFLECTION	158.71	90.50	58.30	40.63	29.91	22.94	18.14
3-span	NEGATIVE WIND LOAD	207.24	119.12	77.03	53.80	39.67	30.44	24.09
	LIVE LOAD/DEFLECTION	195.75	112.25	72.50	50.61	37.24	24.95	17.52
4-span	NEGATIVE WIND LOAD	194.44	111.53	72.04	50.29	37.06	28.43	22.50
	LIVE LOAD/DEFLECTION	183.56	105.06	67.79	47.29	34.84	26.54	18.64

Notes:

- Strength calculations based on the 2012 AISI Standard "North American Specification for the Design of Cold-formed Steel Structural Members.
- Allowable loads are applicable for uniform loading and spans without overhangs
- LIVE LOAD/DEFLECTION load capacities are for those loads that push the panel against its supports. The applicable limit states are flexure shear, combined shear and flexure, web crippling at end and interior supports, and a deflection limit of L/180 under strength-level loads
- NEGATIVE WIND LOAD capacities are for those loads that pull the panel away from its supports. The applicable limit states are flexure shear, combined shear and flexure, and a deflection limit of L/60 under 10-year wind loading
- Panel pullover and Screw pullout capacity must be checked separately using the screws employed for each particular application when utilizing this load chart.
- Effective yield strength has been determined in accordance with section A2.3.2 of the 2012 NAS specification.
- The use of any accessories other than those provided by the manufacturer may damage panels, void all warranties and will void all engineering data.
- This material is subject to change without notice.



PRODUCT INFORMATION

PBU ROOF PANEL ALLOWABLE UNIFORM LOADS IN POUNDS PER SQUARE FOOT

29 Gauge (0.0133"), Fy = 60 ksi, Fu = 61.5 ksi								
SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	93.75	52.73	33.75	23.44	17.22	13.18	10.42
	LIVE LOAD/DEFLECTION	67.01	32.53	16.66	9.64	6.07	4.07	2.86
2-span	NEGATIVE WIND LOAD	61.91	37.19	24.61	17.42	12.96	10.00	7.94
	LIVE LOAD/DEFLECTION	70.40	45.18	30.41	21.75	16.28	12.62	9.40
3-span	NEGATIVE WIND LOAD	73.01	44.74	29.96	21.37	15.96	12.36	9.84
	LIVE LOAD/DEFLECTION	80.00	53.43	36.52	22.73	14.32	9.59	6.74
4-span	NEGATIVE WIND LOAD	69.51	42.31	28.22	20.08	14.97	11.58	9.21
	LIVE LOAD/DEFLECTION	77.00	50.82	34.56	24.74	15.58	10.44	7.33

26 Gauge (0.0181"), Fy = 60 ksi, Fu = 61.5 ksi								
SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	133.48	75.08	48.05	33.37	24.52	18.77	14.83
	LIVE LOAD/DEFLECTION	119.08	52.22	26.74	15.47	9.74	6.53	4.58
2-span	NEGATIVE WIND LOAD	114.41	66.59	43.33	30.37	22.44	17.24	13.66
	LIVE LOAD/DEFLECTION	105.60	71.09	46.37	32.55	24.07	18.51	13.88
3-span	NEGATIVE WIND LOAD	138.49	81.62	53.46	37.61	27.86	21.44	17.00
	LIVE LOAD/DEFLECTION	120.00	86.91	57.11	34.86	21.95	14.71	10.33
4-span	NEGATIVE WIND LOAD	130.70	76.70	50.12	35.22	26.06	20.05	15.89
	LIVE LOAD/DEFLECTION	115.50	81.75	53.58	37.71	23.77	15.93	11.18

24 Gauge (0.0223"), Fy = 50 ksi, Fu = 60 ksi								
SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	126.37	71.08	45.49	31.59	23.21	17.77	14.04
	LIVE LOAD/DEFLECTION	125.69	70.70	38.51	22.28	14.03	9.40	6.60
2-span	NEGATIVE WIND LOAD	120.59	69.04	44.56	31.09	22.91	17.57	13.90
	LIVE LOAD/DEFLECTION	117.33	69.40	44.80	31.25	23.03	17.66	13.97
3-span	NEGATIVE WIND LOAD	148.17	85.44	55.34	38.68	28.53	21.90	17.34
	LIVE LOAD/DEFLECTION	133.33	85.87	55.62	38.89	28.68	19.34	13.58
4-span	NEGATIVE WIND LOAD	139.13	80.03	51.77	36.16	26.66	20.46	16.19
	LIVE LOAD/DEFLECTION	128.33	80.43	52.04	36.35	26.81	20.57	14.45

22 Gauge (0.0286"), Fy = 50 ksi, Fu = 60 ksi								
SPAN TYPE	LOAD TYPE	SPAN IN FEET						
		3.0	4.0	5.0	6.0	7.0	8.0	9.0
1-span	NEGATIVE WIND LOAD	163.85	92.16	58.98	40.96	30.09	23.04	18.21
	LIVE LOAD/DEFLECTION	174.46	98.14	52.70	30.50	19.21	12.87	9.04
2-span	NEGATIVE WIND LOAD	168.30	96.14	61.98	43.21	31.83	24.41	19.31
	LIVE LOAD/DEFLECTION	158.71	90.50	58.30	40.63	29.91	22.94	18.14
3-span	NEGATIVE WIND LOAD	207.24	119.12	77.03	53.80	39.67	30.44	24.09
	LIVE LOAD/DEFLECTION	195.75	112.25	72.50	50.61	37.24	24.95	17.52
4-span	NEGATIVE WIND LOAD	194.44	111.53	72.04	50.29	37.06	28.43	22.50
	LIVE LOAD/DEFLECTION	183.56	105.06	67.79	47.29	34.84	26.54	18.64

Notes:

1. Strength calculations based on the 2012 AISI Standard "North American Specification for the Design of Cold-formed Steel Structural Members.
2. Allowable loads are applicable for uniform loading and spans without overhangs
3. LIVE LOAD/DEFLECTION load capacities are for those loads that push the panel against its supports. The applicable limit states are flexure shear, combined shear and flexure, web crippling at end and interior supports, and a deflection limit of L/180 under strength-level loads
4. NEGATIVE WIND LOAD capacities are for those loads that pull the panel away from its supports. The applicable limit states are flexure shear, combined shear and flexure, and a deflection limit of L/60 under 10-year wind loading
5. Panel pullover and Screw pullout capacity must be checked separately using the screws employed for each particular application when utilizing this load chart.
6. Effective yield strength has been determined in accordance with section A2.3.2 of the 2012 NAS specification.
7. The use of any accessories other than those provided by the manufacturer may damage panels, void all warranties and will void all engineering data.
8. This material is subject to change without notice.

The Engineering data contained herein is for the expressed use of customers and design professionals. Along with this data, it is recommended that the design professional have a copy of the most current version of the *North American Specification for the Design of Cold-Formed Steel Structural Members* published by the American Iron and Steel Institute to facilitate design. This Specification contains the design criteria for cold-formed steel components. Along with the Specification, the designer should reference the most current building code applicable to the project jobsite in order to determine environmental loads. If further information or guidance regarding cold-formed design practices is desired, please contact the manufacturer.